查询FM4001供应商

Chip Silicon Rectifier

Formosa MS

FM4001 THRU FM4007

Glass passivated type

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound.
- For surface mounted applications.
- Exceeds environmental standards of MIL-S-19500 / 228
- Low leakage current

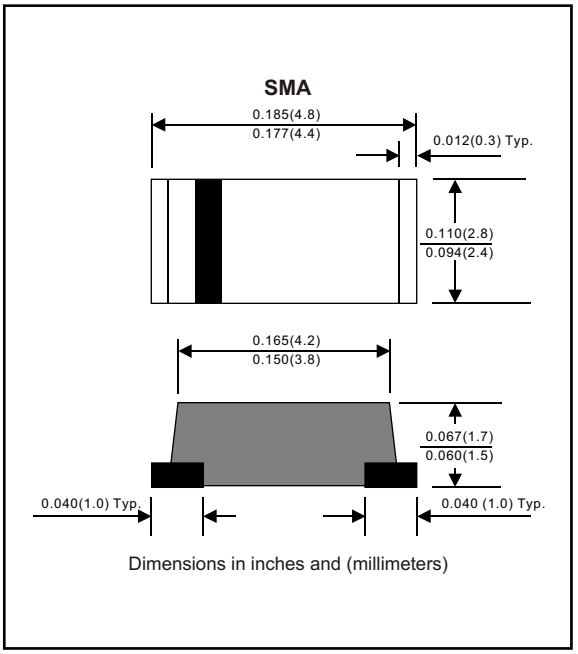

Dimensions in inches and (millimeters)

Mechanical data

Case : Molded plastic, JEDEC DO-214AC
Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
Polarity : Indicated by cathode band
Mounting Position : Any
Weight : 0.0015 ounce, 0.05 gram

MAXIMUM RATINGS (AT T_A=25°C unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.2	I_O			1.0	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC methode)	I_{FSM}			30	A
Reverse current	V_R = V_{RRM} T_A = 25°C	I_R			5.0	uA
	V_R = V_{RRM} T_A = 100°C				50	uA
Thermal resistance	Junction to ambient	Rq_{JA}		50		°C / w
Diode junction capacitance	f=1MHz and applied 4vDC reverse voltage	C_J		15		pF
Storage temperature		T_{STG}	-55		+150	°C

SYMBOLS	MARKING CODE	V_{RRM} *1 (V)	V_{RMS} *2 (V)	V_R *3 (V)	V_F *4 (V)	Operating temperature (°C)
FM4001	A1	50	35	50	1.1	-55 to +150
FM4002	A2	100	70	100		
FM4003	A3	200	140	200		
FM4004	A4	400	280	400		
FM4005	A5	600	420	600		
FM4006	A6	800	560	800		
FM4007	A7	1000	700	1000		

*1 Repetitive peak reverse voltage
*2 RMS voltage
*3 Continuous reverse voltage
*4 Maximum forward voltage

RATING AND CHARACTERISTIC CURVES (FM4001 THRU FM4007)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

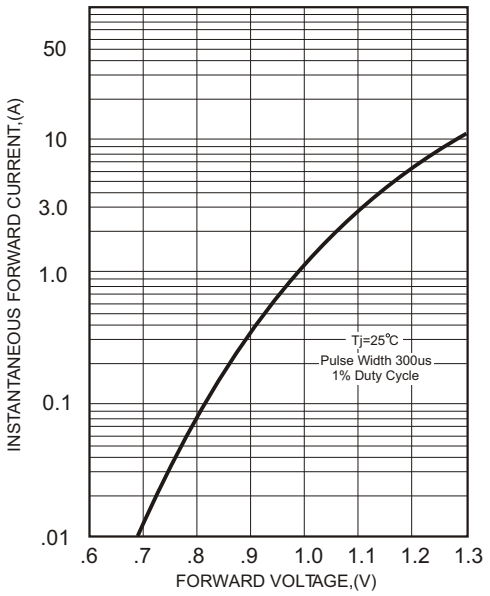

FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

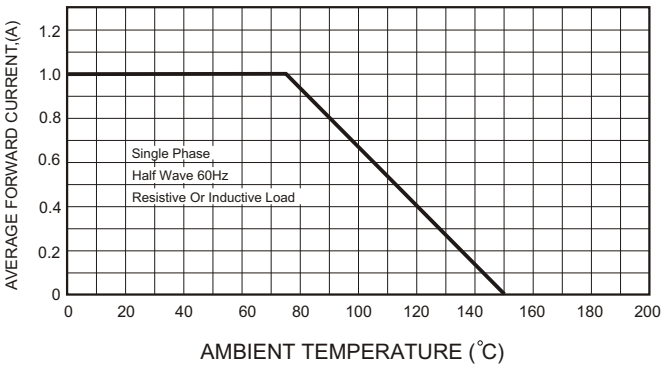

FIG.3 - TYPICAL REVERSE CHARACTERISTICS

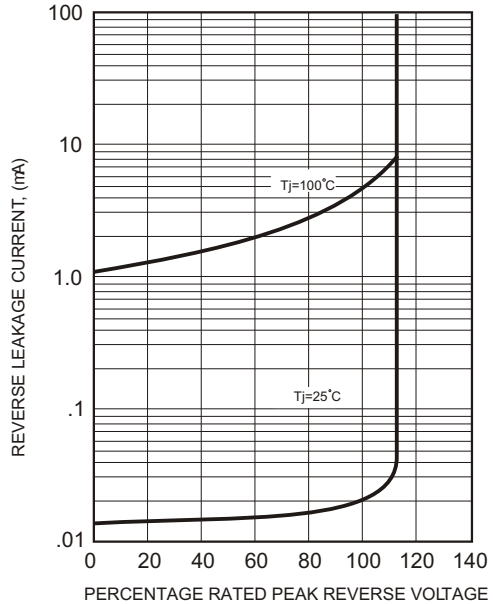

FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

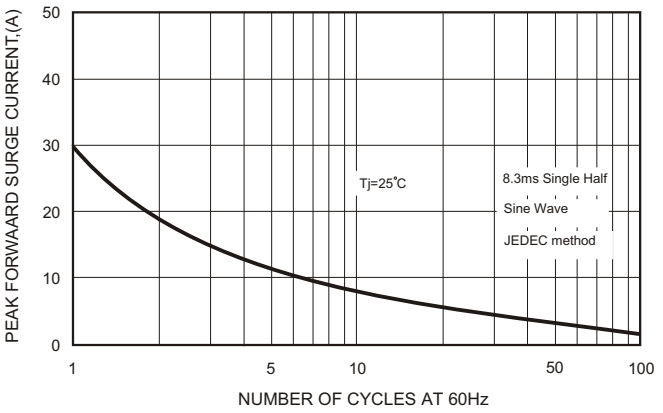

FIG.5-TYPICAL JUNCTION CAPACITANCE